


A: T/R (dB) B: θ Δ MKR 3 155.985 Hz
 A MAX 20.00 dB ΔGAIN -916.646 mdB
 B MAX 250.0 deg ΔPHASE dB

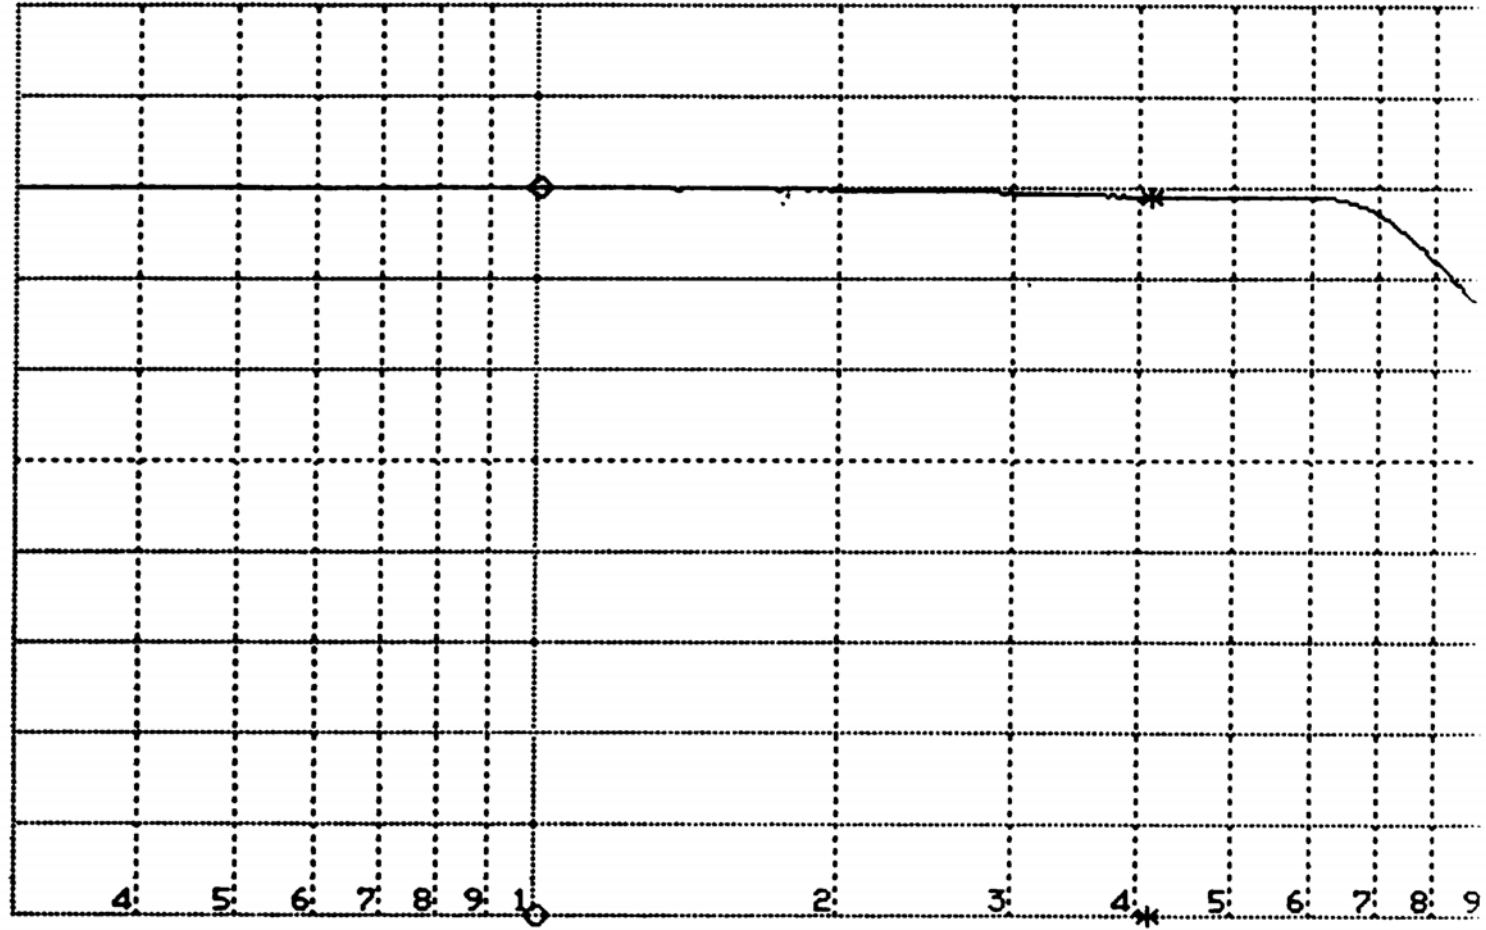

A MIN -80.00 dB START 300.000 Hz
 B/DIV 50.00 deg STOP 10 000.000 Hz
 INSERTION-LOSS DISTORTION ■

With Test loop.