

- DC Line Filter for ATM Application
- 4PIN / Through hole type
- Available for tube packing
- Designed for UL 1950 & IEC 60950 safety

## ➢ SCHEMATIC

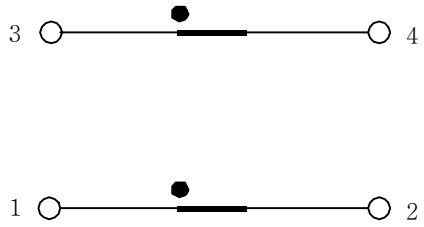


## ➢ DIMENSION

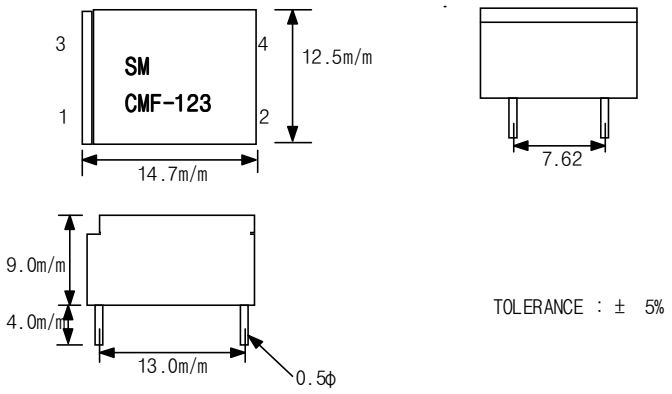


TOLERANCE : ± 5%

## ➢ ELECTRICAL SPECIFICATION

| PART NO. | 10 MHz | 50 MHz | 100 MHz |
|---|---|---|---|
| SM CMF-123 | MAX -18.0dB | MAX -12.0dB | MAX -12.0dB |

| PART NO. | Rated Current | INDUCTANCE (3-4) f=100KHz | DCR (3-4) |
|---|---|---|---|
| SM CMF-123 | MAX. 1A | MIN 12.0mH | MAX. 30 mΩ |

FOR MORE INFORMATION, PLEASE CONTACT US.