

- For ADSL Inductor
- 9Pin/ Through hole type
- provide high quality at a competitive price

➢ SCHEMATIC



TURN RATIO
1-4 : 2-5
= 1 : 1

➢ DIMENSION

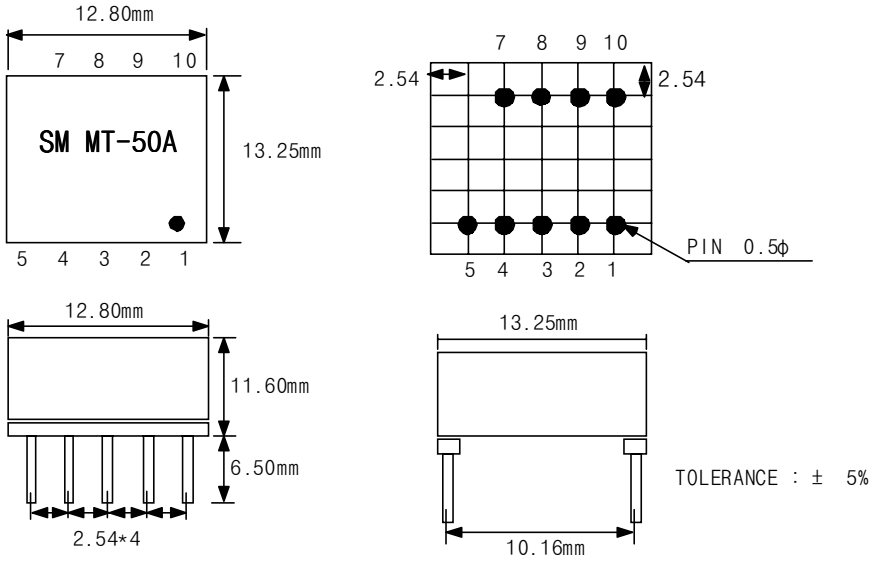

TOLERANCE : ± 5%

➢ ELECTRICAL SPECIFICATION

SM MT-50A	1ST INDUCTANCE(Lp) f=10KHz, 1.0V	2ND INDUCTANCE(Ls) f=10KHz, 1.0V
SPEC	5.5mH ± 10%	5.5mH ± 10%
PIN NO.	1-4	2-5

SM MT-50A	1ST DCR (Rp)	2ND DCR(Rs)
SPEC	4.17Ω ± 10%	4.23Ω ± 10%
PIN NO.	1-4	2-5

FOR MORE INFORMATION, PLEASE CONTACT US.