

- For ADSL Inductor
- 10Pin / Surface Mount type
- provide high quality at a competitive price

## ➢ SCHEMATIC

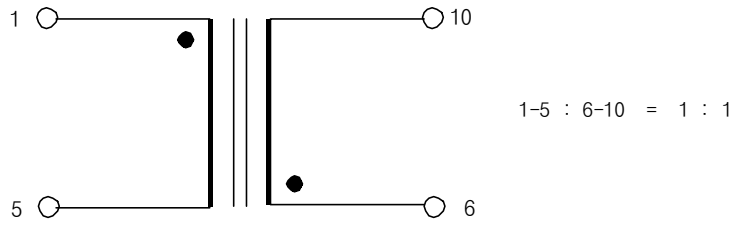


## ➢ DIMENSION

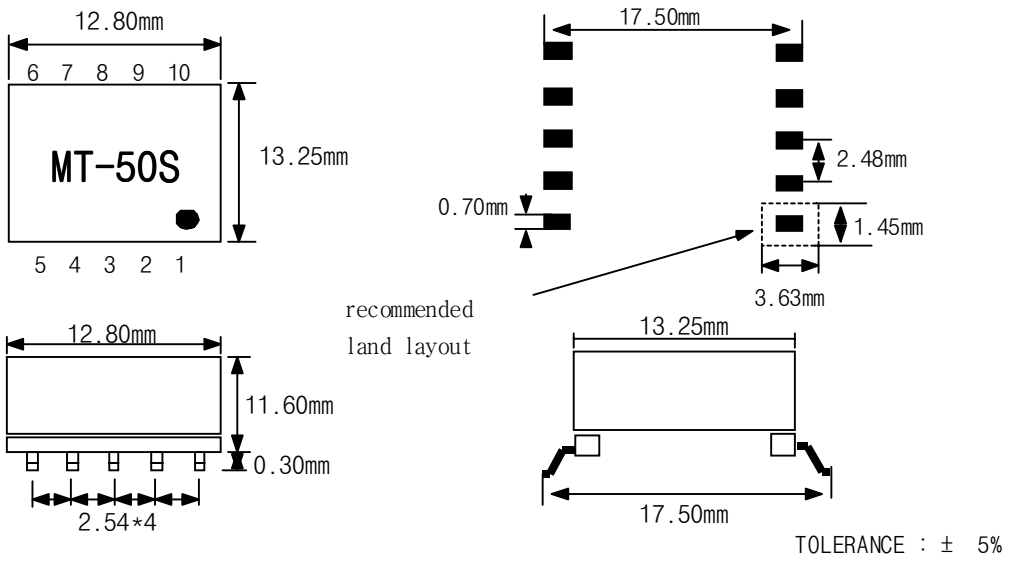


TOLERANCE : ± 5%

## ➢ ELECTRICAL SPECIFICATION

| SM MT-50S | 1ST INDUCTANCE (Lp)<br>f=10KHz, 1.0V | 2ND INDUCTANCE (Ls)<br>f=10KHz, 1.0V |
|---|---|---|
| SPEC | 4mH ± 5% | 4mH ± 5% |
| PIN NO. | 1-5 | 6-10 |

| SM MT-50S | 1ST DCR(Rp) | 2ND DCR(Rs) |
|---|---|---|
| SPEC | MAX 4Ω | MAX 4Ω |
| PIN NO. | 1-5 | 6-10 |

FOR MORE INFORMATION, PLEASE CONTACT US.