

- Normal Mode Filter for 48VDC Phantom Power
- 4PIN / Through hole type
- Designed for UL 1950 & IEC 60950 safety
- Available for tube packing

➢ SCHEMATIC

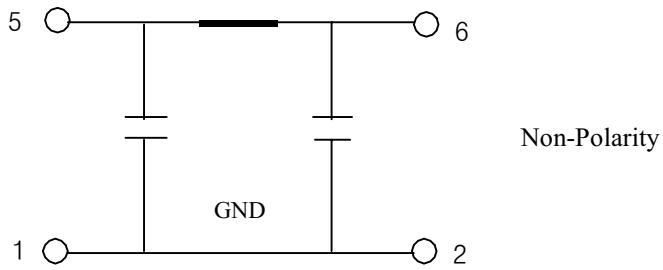

•➢ DIMENSION

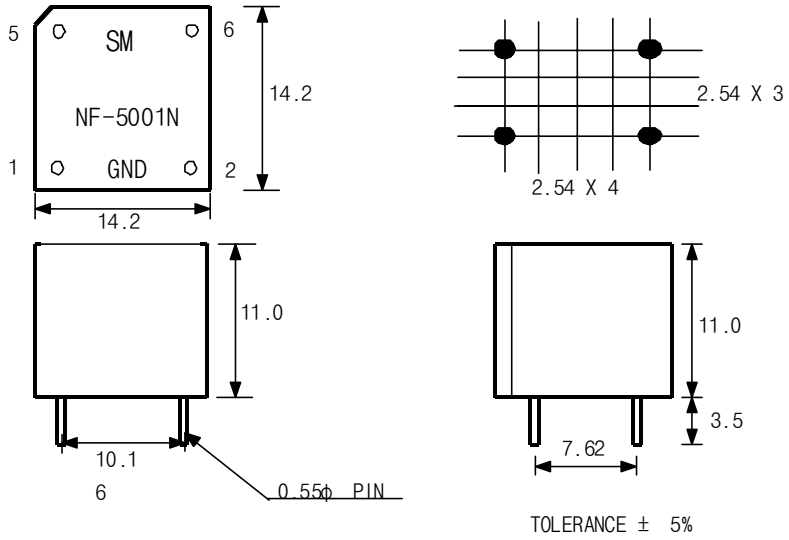

➢ ELECTRICAL SPECIFICATION

PART NO.	1 KHz	100 KHz	10 MHz	50 MHz	100 MHz
SM NF-5001N	MIN -0.45 dB	MIN -7.0 dB	MIN -8.3 dB	MIN -20.0 dB	MIN -25.0dB

PART NO.	Rated Current	Rated Voltage	Rated DCR
SM NF-5001N	MAX. 1A	DC 48 V	MAX. 20 mΩ

FOR MORE INFORMATION, PLEASE CONTACT US.