

- For Broadcom BCM 6010 / TI TNETD8000 Chipset
- Line Transformer
- 6Pin/Surface mount type
- provide high quality at a competitive price


➢ SCHEMATIC

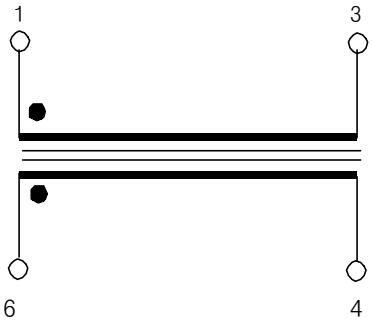

TURN RATIO
1-3 : 4-6 = 1 : 1

➢ DIMENSION

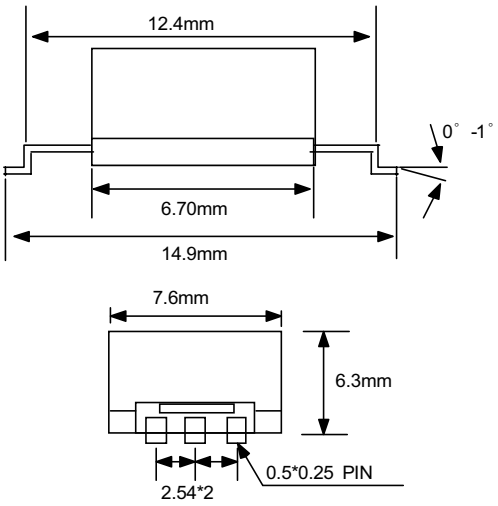



TOLERANCE : ± 5%

➢ ELECTRICAL SPECIFICATION

SM ST-63S	1ST INDUCTANCE(Lp) f=10KHz, 0.5V	2ST INDUCTANCE(Ls) f=10KHz, 0.5V	LEAKAGE INDUCTANCE(Lk) f=10MHz, 0.5V
SPEC	MIN 450 μ H	MIN 450 μ H	MIN 0.3 μ H
PIN NO.	1-3	4-6	1-3(6-4 SHORT)

SM ST-63S	INTERWINDING CAPACITANCE(Cw) f=10MHz, 0.5V	1ST RESISTANCE(Rp)	2ND RESISTANCE(Rs)
SPEC	MAX 60 pF	MAX 0.3 Ω	MAX 0.3 Ω
PIN NO.	1-6	1-3	6-4

FOR MORE INFORMATION, PLEASE CONTACT US.

SUNMYUNG ELECTRO-TELECOM CO., LTD. WWW.SUNMYUNG.COM