
SIGNAL FILTER SM TC-80321


- Signal Filter for high-frequency in ISDN Application
- 8PIN / Through hole type
- Designed for UL 1950 & IEC 60950 safety

➢ SCHEMATIC

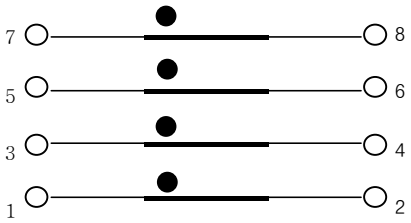

TURN RATIO
1-2 : 3-4 : 5-6 : 7-8
= 1 : 1 : 1 : 1

•➢ DIMENSION

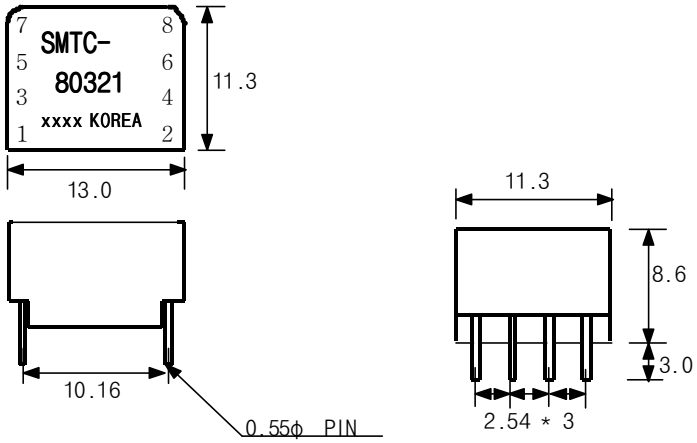

➢ ELECTRICAL SPECIFICATION

PART NO.	300 KHz	1 MHz	10 MHz	50 MHz	100 MHz
SM TC-80321	MIN -8.5dB	MIN -13.0dB	MIN -20.0dB	MIN -15.0dB	MIN -10.0dB

PART NO.	Rated Current	Rated Voltage	Rated DCR
SM TC-80321	-	-	MAX. 100 mΩ

FOR MORE INFORMATION, PLEASE CONTACT US.

SUNMYUNG ELECTRO-TELECOM CO., LTD. WWW.SUNMYUNG.COM